


Mini Mil Tac™				Multi-Mode			
Part No	Fibre Count	Diameter (mm)	Weight (Kg/Km)	Minimum Bend Radius Short Term (mm)	Minimum Bend Radius Long Term (mm)	Tensile Load Short Term (N)	Tensile Load Long Term (N)
MMT020M3	2	3.4	10	35	20	1000	500

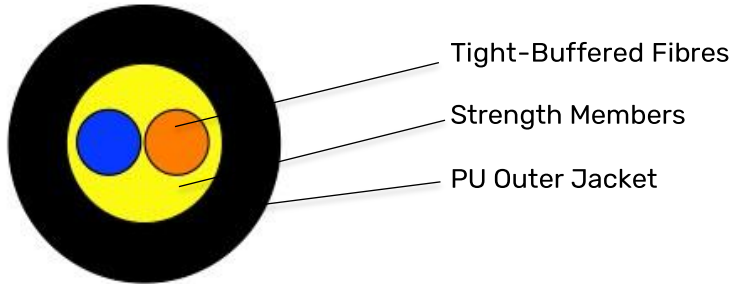

Cable Sheath Printing
Mini Mil Tac 2 Core MM OM3 Bend Insensitive PU Fibre Optic Cable Ref No Metre Mark

Cable values are all estimated values:		
Primary Acrylate Coating	250 μ	
Hard Elastomeric Tight Buffer	900 μ	
Proof Test Level	100 kpsi	
Wavelength	850 nm	1300 nm
Maximum Attenuation	2.7 dB/Km	0.9 dB/Km
Minimum Bandwidth (OFL)	1500 MHz x km	500 MHz x km
Minimum Bandwidth (Laser)	2000 MHz x km	

Design Criteria	
Impact Resistance	20 Impacts
Crush Resistance	700N/cm
Operating Temperature	55°C to +85°C
Cable Sheath Material	Polyurethane
Fibres are Bend Tolerant	ITU-T G.657.A1

Tests Carried Out
IAW EIA/TIA-455 Military Requirement
IEC 60794-1-2

Mini Mil Tac™ is a registered Trademark of QAD Networks Ltd | Tel: 01787 462489 | www.qadnetworks.co.uk